

Wingspan Series WS-6600



Specifications

| | |
|-------------------|--|
| Viewing Angle | 170° |
| Input Voltage | 24vDC |
| Watts | 6 w/mod (4.8w/ft.) |
| Luminous Efficacy | 114(lm/W) |
| Modules/Foot | .8/ft. fully stretched |
| Protection Grade | IP65 |
| Packaging | Anti-static bag, 15 modules (18.75 ft)/bag |
| Warranty | 7 Year (Product) / 5 Year (Labor) |
| Operating Temp. | -40° ~ +60 °C / -40° ~ +140 °F |
| Storage Temp. | -40° ~ +70 °C / -40° ~ +158 °F |
| Cascade | 15 mods single-ended power feed (pcs) 30 mods double-ended power feed (pcs) |

LM79 LM80 L70:5+ YEARS


| Color | Part# | Color Temp | Lumens |
|------------|-------------|------------|-------------------------|
| Pure White | HLED-WS6600 | 6500K | 684 lm/mod (547 lm/ft.) |

Features

- Fast installation
- Great for LED Retrofits and new builds!
- No peeling or sticking modules necessary
- Wingspan Lens Technology helps prevent Hot Spots
- Less Labor/Less Product: Cut costs in half!
- Ideal for double-sided pylons & Cabinets
- Guaranteed life over 50,000hrs
- 24" centers at 8-10" from face (may vary depending on Sign face type)
- DIY Layout Tool at hanleyledsolutions.com
(Available in English, Spanish, and French)

| MODEL | MAX POWER SUPPLY LOAD | | | |
|---------|-----------------------|--------|--------|--------|
| | 60W | 100W | 150W | 240W |
| WS-6600 | 10mods | 16mods | 24mods | 40mods |

Profile Drawings

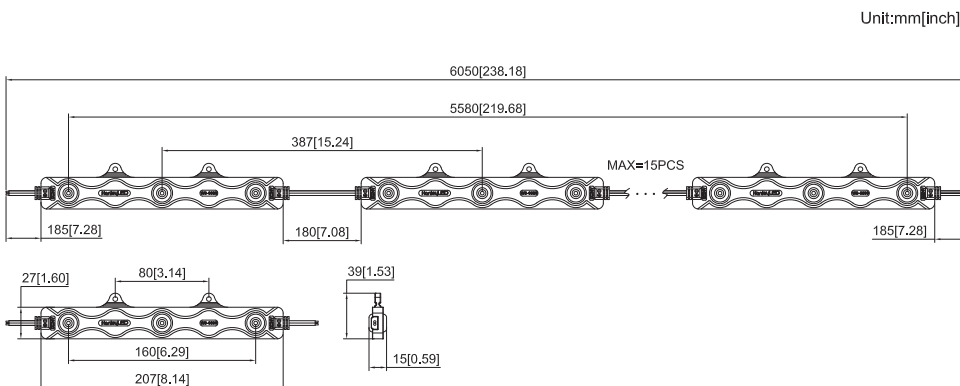

Light Distribution

