


Packaging:

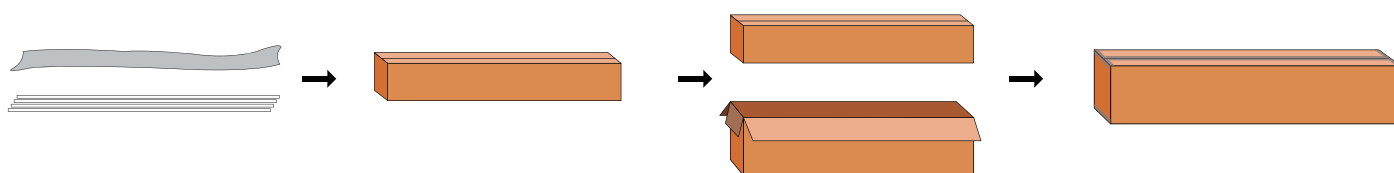

6 Kestrel Sticks Per Box | 12 Kestrel Sticks Per Case

Your power saving, labor saving, cost saving Kestrel Stick is ready to go out of the package. Each stick includes our patented cap design for HO socket retrofits, or mount with aluminum angle bars or our new construction mounting brackets.

Item	LED Lamp Cross Reference	Included Accessories	Module QTY Per Bar	Watts (w)	Lumens (lm) (Per Stick)	Actual size (in)
HLED-KSS1S24	F24HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer 	4	4.8w	792	21.91"
HLED-KSS2S24			8	9.6w	1584	
HLED-KSS1S30	F30HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer 	5	6w	990	27.91"
HLED-KSS2S30			10	12w	1980	
HLED-KSS1S36	F36HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer 	6	7.2w	1188	33.91"
HLED-KSS2S36			12	14.4w	2376	
HLED-KSS1S42	F42HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer 	7	8.4w	1386	39.91"
HLED-KSS2S42			14	16.8w	2772	
HLED-KSS1S48	F48HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer 	8	9.6w	1584	45.91"
HLED-KSS2S48			16	19.2w	3168	
HLED-KSS1S60	F60HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	10	12w	1980	57.91"
HLED-KSS2S60			20	24w	3960	
HLED-KSS164	F64HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	10	12w	1980	61.91"
HLED-KSS264			20	24w	3960	
HLED-KSS1S72	F72HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	12	14.4w	2376	69.91"
HLED-KSS2S72			24	28.8w	4752	
HLED-KSS1S84	F84HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	14	16.8w	2772	81.91"
HLED-KSS2S84			28	33.6w	5544	
HLED-KSS1S96	F96HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	16	19.2w	3168	93.91"
HLED-KSS2S96			32	38.4w	6336	
HLED-KSS1S108	F108HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	18	21.6w	3564	105.91"
HLED-KSS2S108			36	43.2w	7128	
HLED-KSS1S117	F117HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	16	19.2w	3168	114.91"
HLED-KSS2S117			32	38.4w	6336	
HLED-KSS1S120	F120HO	<ul style="list-style-type: none"> • End Cap for HO Socket • HO Socket Stabilizer • Joint Bracket 	20	24w	3960	117.91"
HLED-KSS2S120			40	48w	7920	

NOTE:

All materials removed must be disposed of in accordance with applicable local, state, and federal laws.

WARNING check polarity: All connections must be WHITE-TO-RED (+) and BLACK-TO-BLACK (-). Reverse polarity connections may damage the LEDs and will void product warranty.

Caution: Turn off power to sign before inspecting or removing existing light source. Power must remain off while installing the Kestrel Stick System.

Layout Guidelines

Single Sided Depth	Double Sided Depth	Space Between Sticks
4"	8-9"	9"
5-6"	10-13"	12"
7"	14-15"	15"
8-9"	16-18"	20"
10-15"	20-30"	22"

* If cabinet exceeds 15" single sided depth, or 30" double sided depth mount sticks 8" away from the face on both sides and space 12".*

Power Supply Load Chart & Cascading (Kestrel Sticks in a series) Information Guidelines

Item	Watts/Stick	Power Supplies (24v)				Cascading/Run Information
		60w H60W-PPS524V H60W-PPSEM24V	100w H100W-PPS524V H100W-PPSEM24V	150w H150W-PPS524V H150W-PPSEM24V	240w H240W-PPS524V	Max Series Wired
		Max Number of Kestrel Sticks Per Power Supply				
HLED-KSS1S24	4.8w	12	20	30	48	N/A
HLED-KSS2S24	9.6w	6	10	14	24	
HLED-KSS1S30	6w	10	16	24	40	N/A
HLED-KSS2S30	12w	5	8	12	20	
HLED-KSS1S36	7.2w	8	13	20	32	N/A
HLED-KSS2S36	14.4w	4	6	10	16	
HLED-KSS1S42	8.4w	7	11	16	28	N/A
HLED-KSS2S42	16.8w	3	5	8	12	
HLED-KSS1S48	9.6w	6	10	14	24	N/A
HLED-KSS2S48	19.2w	3	5	6	12	
HLED-KSS1S60	12w	5	8	12	20	N/A
HLED-KSS2S60	24w	2	4	6	8	
HLED-KSS164	12w	5	8	12	20	N/A
HLED-KSS264	24w	2	4	6	8	
HLED-KSS1S72	14.4w	4	6	10	16	N/A
HLED-KSS2S72	28.8w	2	3	4	8	
HLED-KSS1S84	16.8w	3	5	8	12	N/A
HLED-KSS2S84	33.6w	1	2	4	4	
HLED-KSS1S96	19.2w	3	5	6	12	N/A
HLED-KSS2S96	38.4w	1	2	2	4	
HLED-KSS1S108	21.6w	2	4	6	8	N/A
HLED-KSS2S108	43.2w	1	2	2	4	
HLED-KSS1S117	19.2w	3	5	6	12	N/A
HLED-KSS2S117	38.4w	1	2	2	4	
HLED-KSS1S120	24w	2	4	6	8	N/A
HLED-KSS2S120	48w	1	2	2	4	